

APPLICATION OVERVIEW:

In collaboration with Prime AE and Law General Contracting, we designed a sanitary pump station for the Fairfield County Airport located in Lancaster, Ohio.

PUMP STATION DETAILS:

Our team constructed this 15.5-foot-deep prefabricated fiberglass pump station. Excel Fluid Group factory-installed all internal components within the wet well, including the piping and valves. The system is equipped with two Barnes grinder pumps, all managed by an Excel duplex control panel.

INSTALLATION:

The installation was completed by Law General Contracting with the oversight of Excel Fluid Group as shown below:



PUMP SYSTEM

EXCEL Fiberglass Pump Station



INSTALL DATE

January 2024





OPERATIONAL IMPROVEMENT

Small Pump Station Footprint



SERVICE AREA

Fairfield County Airport

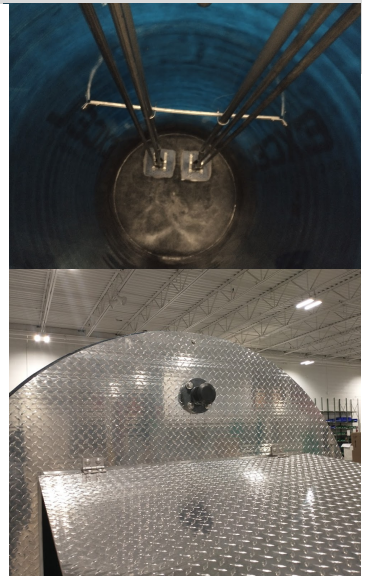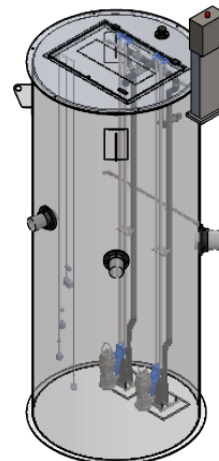

March 2024

Design-Build Pump Stations